




Hipstreet Titan 2 HD Rear Case Replacement

This guide will give step-by-step instructions on how to open and disassemble the Hipstreet Titan 2 HD device cover.

Written By: Jeffrey

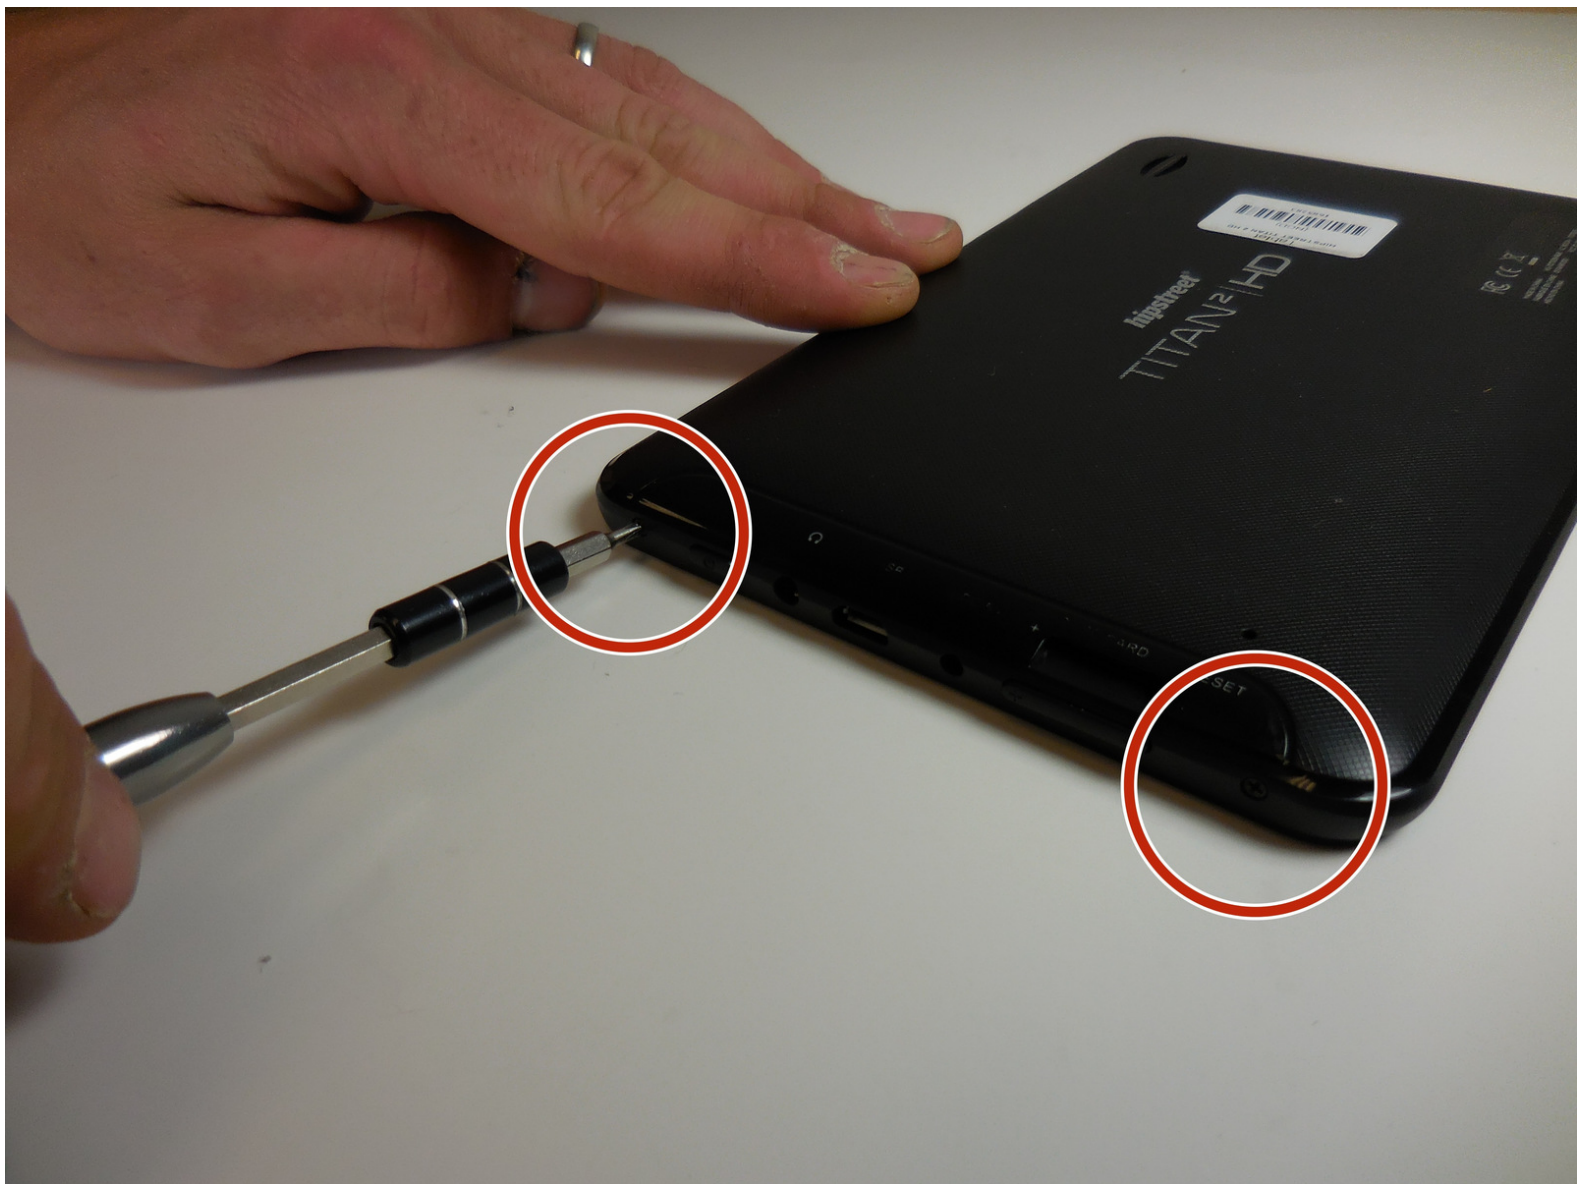

INTRODUCTION


Disassembling the Hipstreet Titan 2 HD cover is a simple 5-10 minute process that is essential to fixing any component in the device.



TOOLS:

- [iFixit Opening Tools](#) (1)
 - [Suction Handle](#) (1)
 - [Phillips #000 Screwdriver](#) (1)
-

Step 1 — Rear Case

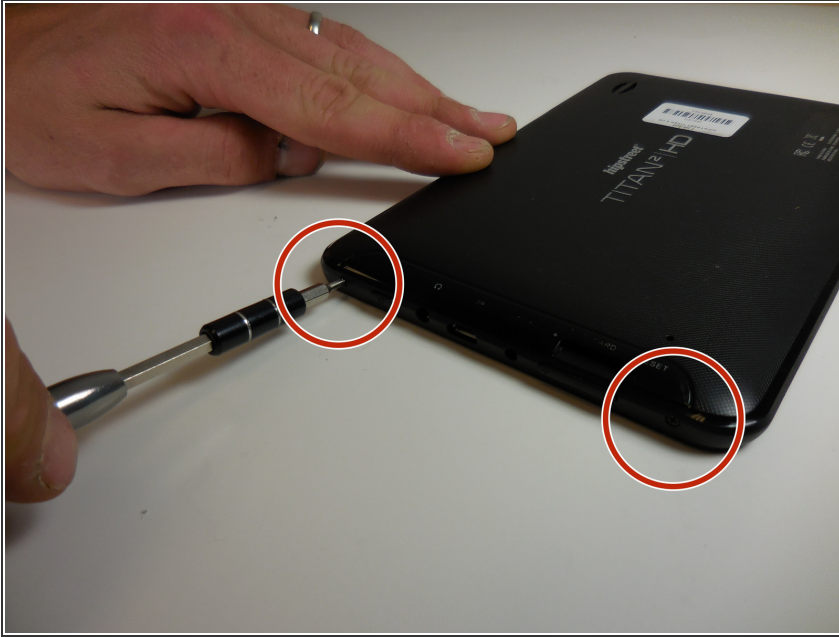


- Using the PH#00 screwdriver, remove the two 0.145 inch Phillips head screws.
- ⓘ The screws are located on the bottom face of the device, near the power and volume controls.

Step 2



- Place the small suction cup on your screen.
- ⓘ Moisturize the bottom of the suction cup to ensure a proper seal.
- ⚠ If the screen is cracked, the suction cup may not seal correctly; too much pressure may crack or damage the screen.

Step 3

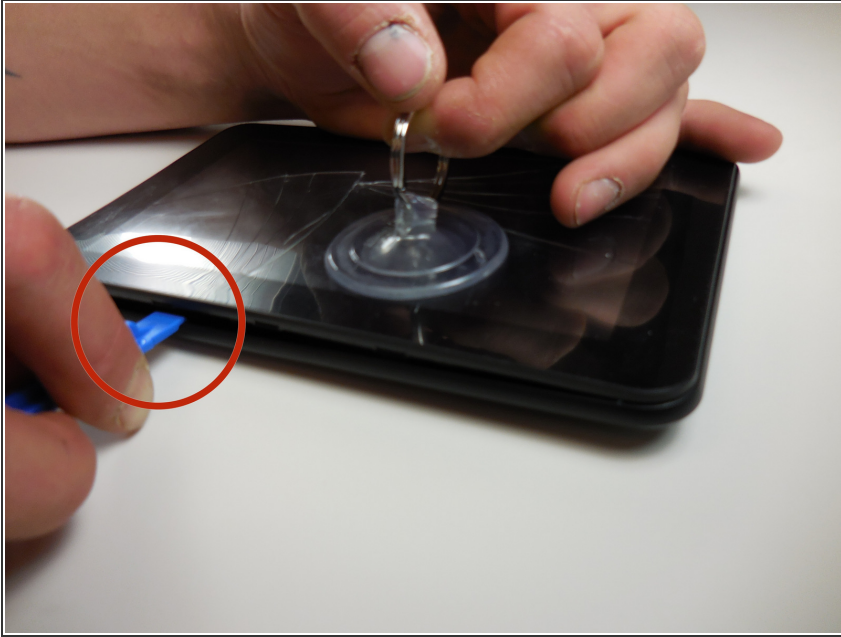

- Insert the plastic opening tool between the screen cover and rear cover of the tablet.
- Grasp the small suction cup.



Step 4



- Slide the plastic opening tool along device edge to separate the screen cover from the rear cover.
- Pull upward on the small suction cup handle while sliding the opening tool.

⚠ When sliding the plastic opening tool, avoid sliding the tool too far into the cover. This could damage the speaker connector on the back cover.

Step 5

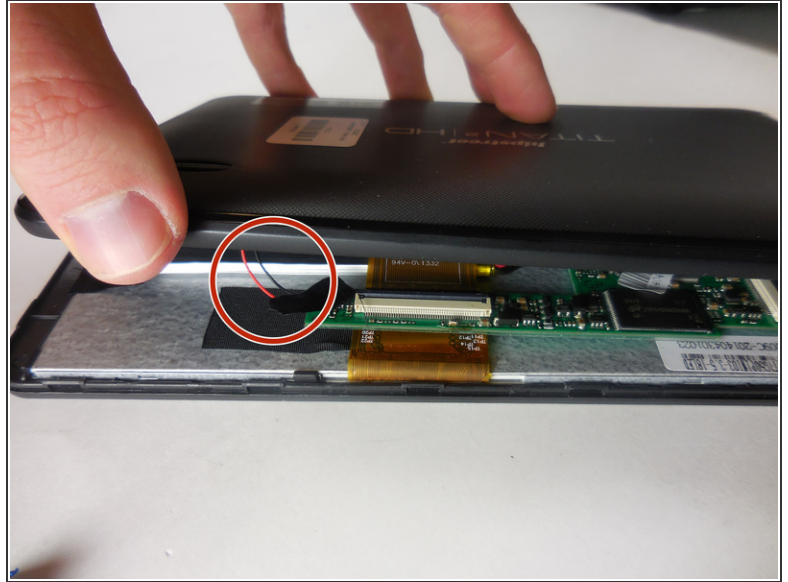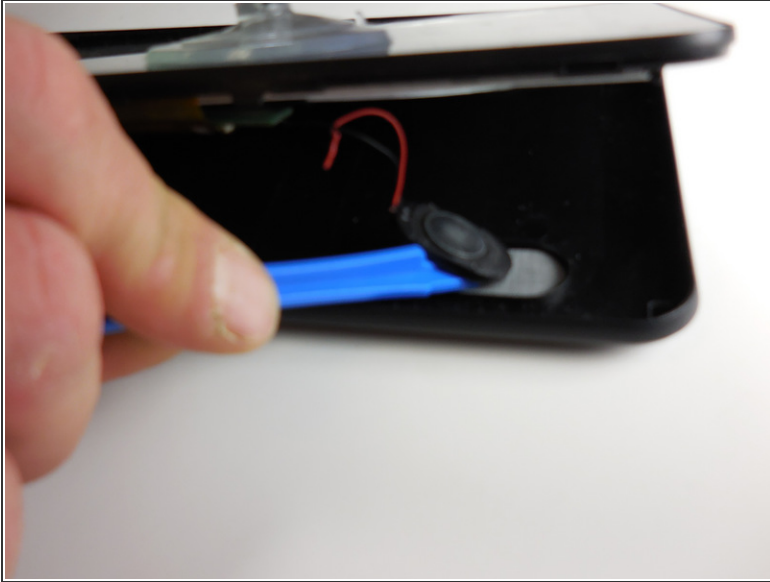

- Use the plastic opening tool to remove the speaker from the rear cover.
- ⓘ The speaker is held in place with adhesive and is easily removed.
- ⚠ Do not pull on the speaker wires. This could damage the soldering connections.

Step 6



- Once the speaker is disconnected, the cover removal is complete.

Congratulations your tear down is complete. To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-26 05:12:06 AM.